

Faculty of Mathematics and Physics
Charles University in Prague
3rd March 2015



UT2004 bots made easy!

Pogamut 3

Lecture 2 – Gentle introduction





Warm up



- Fill the short test for this lessons
 - Find the test here (no-ads):
 - <http://goo.gl/5WIM9y>
 - Permanent link:
 - https://docs.google.com/forms/d/1uit8-5yWNB_IUcGdYwrCd2IE1G8J6YgluWXtAWjxP5k/viewform
- 5 minutes limit

Virtual worlds

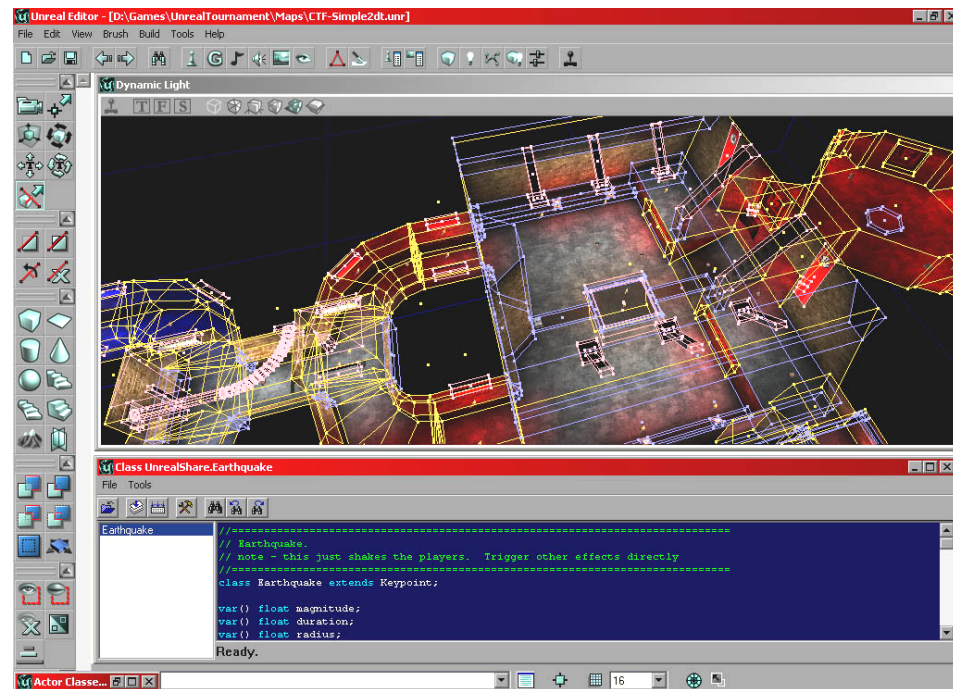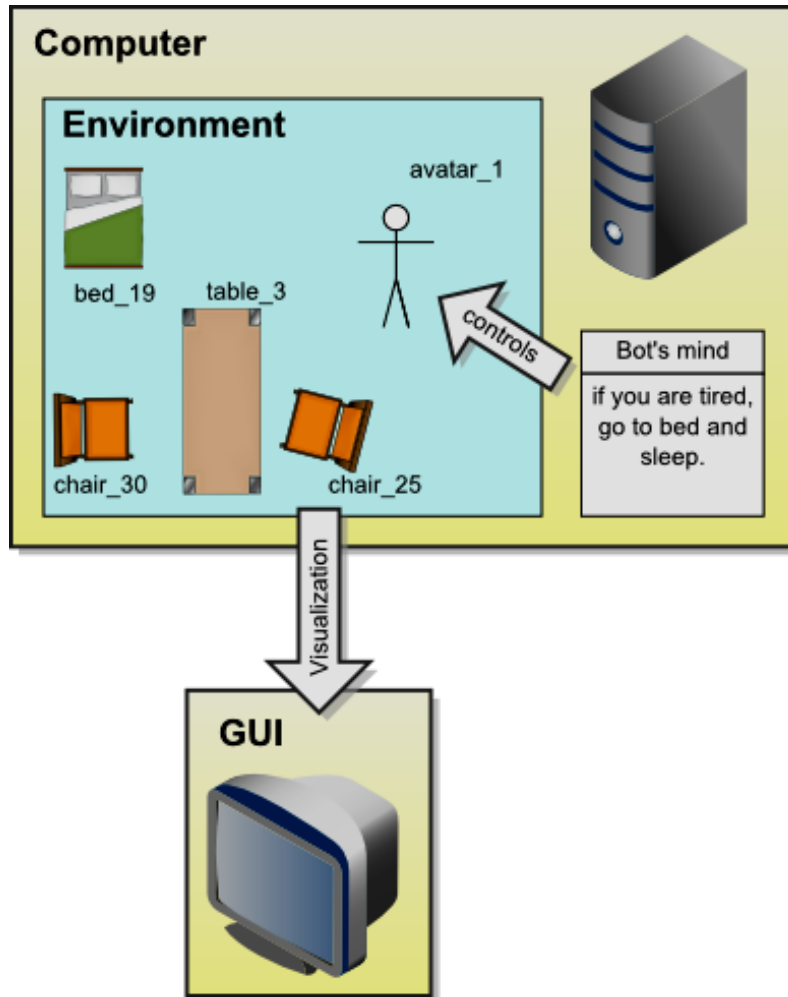

IVAs and Virtual worlds



Environment state (E)



Perception (P)

Memory (S)



Action (A)

1. Part of environment state E is exported to the agent $p(E) = P$
2. Agent performs action-selection: $f(P, S) \rightarrow A \times S$
3. Actions are carried out in the environment: $a(A^n, E) \rightarrow E$

IVAs and Virtual worlds




Environment state (E)



Dynamic world

*Non-complete
information*

Perception (P)



Action (A)

Actions may fail!

Memory (S)




Inaccurate

1. Part of environment state E is exported to the agent $p(E) = P$
2. Agent performs action-selection: $f(P, S) \rightarrow A \times S$
3. Actions are carried out in the environment: $a(A^n, E) \rightarrow E$

Pogamut 3 platform

UT2004 and IVAs

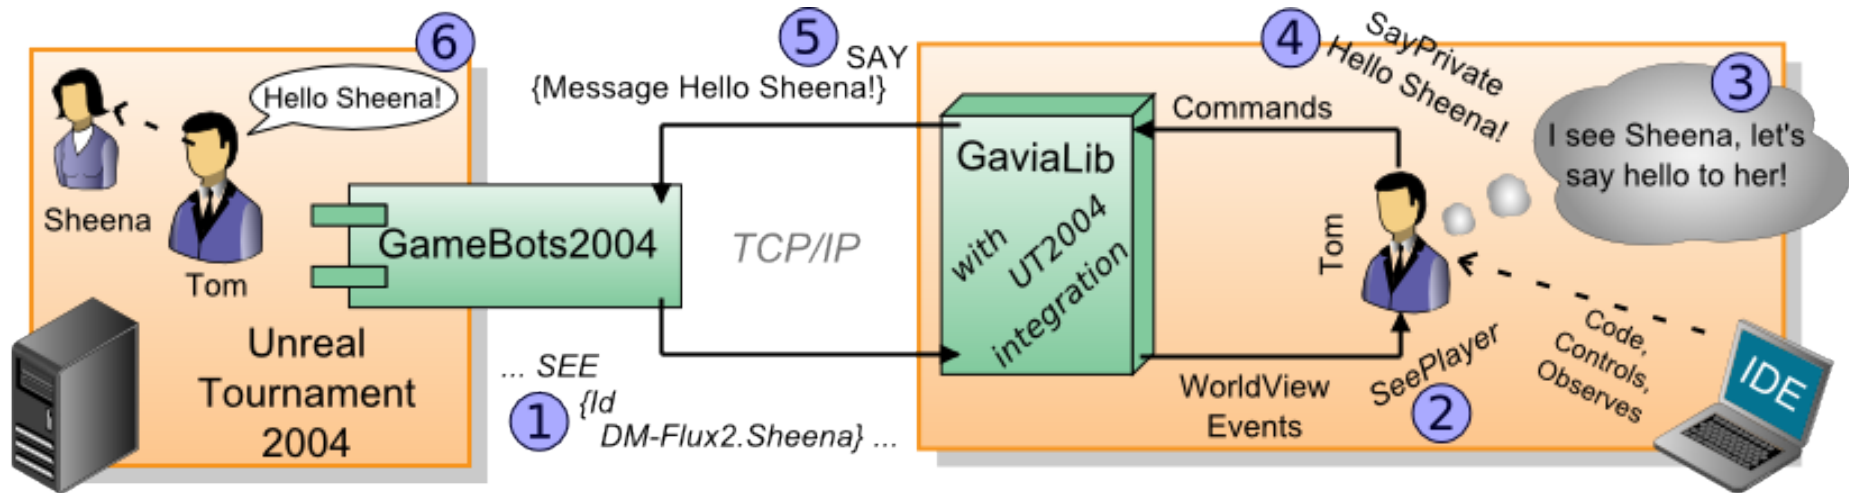

UT2004 is providing action execution function a .

GameBots2004 mediates decisions to UT2004 and implements partial observability function p .


Pogamut 3 provides observe function o .

You have to supply reason function r , decide function d and possibly extra memory states S .

Decision Making System



- Reactive DMS
- Mushroompicker Cyril

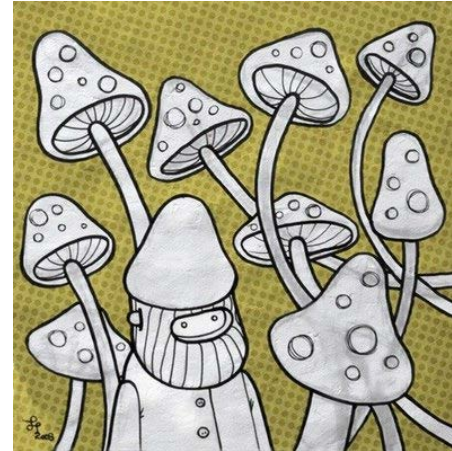

Initial state: not_at_home AND picking_mushrooms

- | | |
|---------------------------------------|-----------------------|
| 1. IF in_front_of_obstacle | THEN change_rotation |
| 2. IF full_basket AND picking | THEN stop_picking |
| 3. IF see_mushroom AND picking | THEN put_it_to_basket |
| 4. IF noon AND picking | THEN stop_picking |
| 5. IF at_home | THEN end |
| 6. IF picking | THEN random_walk |
| 7. IF not_picking | THEN go_home |

Pogamut Interface

World / Agent



■ WorldView

- A sort of working memory storing all the information bot knows about environment
- Or a bot current overview of the world
- Access by `this.world` or `this.getWorldView()`

■ Act

- Interface enabling to send bot commands – move to location, start shooting, jump, etc.
- Access by `this.act` or `this.getAct()`

Pogamut API

Basics



- **In JavaDoc**
 - http://pogamut.cuni.cz/pogamut_files/latest/doc/javadoc/
- **Bot messages**
 - Provide bot with information about environment
 - All of them are subclasses of **InfoMessage** object
- **Bot commands**
 - Allow bot to do things in environment (move, shoot...)
 - All of them are subclasses of **CommandMessage** object

Pogamut API

Bot messages



- Provide information about environment
- Two types
 - **IWorldObject** vs. **IWorldEvent**
- **IWorldObject** – persistent object in the game that is typically located (ILocated) and can be seen (IViewable)
 - Stored in WorldView with last observed values
- **IWorldEvent** – marks one event in the environment
 - Is not stored and can be missed
 - Listen to events through listeners

Pogamut web



Main web

- <http://pogamut.cuni.cz/>

JavaDoc (IMPORTANT!)

- http://pogamut.cuni.cz/pogamut_files/latest/doc/javadoc/

Lecture web

- <http://pogamut.cuni.cz/pogamut-devel/doku.php?id=lectures>

Tutorials

- http://pogamut.cuni.cz/pogamut_files/latest/doc/tutorials/

Pogamut manual installation Win32

- http://pogamut.cuni.cz/main/tiki-download_file.php?fileId=22

Pogamut on Linux (external)

- <http://cicolink.blogspot.com/2011/11/unreal-tournament-2004-create-bot-with.html>

Installation of Pogamut

Step 1: Install Pogamut



- Run Pogamut installer that can be found inside Download section at
 - <http://pogamut.cuni.cz>

Import bot project

Step 2: Create new bot project



- Follow the tutorial at:
 - http://pogamut.cuni.cz/pogamut_files/latest/doc/tutorials/OpeningExamples.html



Tutorial 1 – Empty bot

- Get the bot from our lecture site
- We look into the basics of Pogamut bot methods and API...
- See the tutorial:
 - http://pogamut.cuni.cz/pogamut_files/latest/doc/tutorials/EmptyBotTutorial.html

...

- Let's fool around 😊

Starting Pogamut Bot



1. Starting the game environment
 - UT2004 dedicated server
 - Start->Programs->Vyvojove Nastroje->Pogamut->run GameBots DM server
2. Starting the vizualizator (the game UT2004)
 - Start->Programs->Vyvojove Nastroje->Pogamut->run UT2004
3. Starting the bot itself
 - Inside NetBeans – right click the project and select Run

Tutorial 2 – Simple bot



- Listeners – listening to changes in the environment
- See the tutorial:
 - http://pogamut.cuni.cz/pogamut_files/latest/doc/tutorials/ResponsiveBotTutorial.html

...

- Let's fool around again!

Assignment (or HomeWork)



■ Extend EmptyBot:

1. To listen to the player commands
 - If I say "hi", bot responds
 - "Start following" – bot starts following
 - "Stop following" – bot stops following
2. Remember last position of the player and if the player is lost, run to that location
3. If the bot doesn't see the player, start turning around to scan your surroundings
4. If the bot is hit, it jumps and screams (in text)
 - BONUS: try to return as many damage as received

Assignment (CheatSheat)



- Listen to **GlobalChat** event to receive text messages
- Use **SendMessage** command to send text messages to the game
- Listen to **BotDamaged** + **PlayerDamaged** event to react to bullet hits
- Module **this.players** holds information about other players in the game
- Module **this.move** provides basic locomotion commands and **this.shoot** provides basic shooting
- You can communicate with your bot from within UT2004 by pressing TAB and typing '**say hi**' (without quotes of course)

Send your assignments to



- Completely zip-up your project(s) folder
 - **WITHOUT** the **target** folder!
- Send it to:
 - Jakub Gemrot (Tuesday workshops)
 - gemrot@gamedev.cuni.cz